



CUTLASSES GLOOP

FOUR PLAYHEAD LOOPER

Eurorack DIY Kit
Build Instructions



OVERVIEW

For the most recent version of this document please visit <https://www.thonk.co.uk/shop/cutlasses-gloop>

Follow the github link below for firmware files, update instructions and user manuals.

<https://github.com/cutlasses/GloopResources/tree/main>

This document has hi-res images. **ZOOM IN** for a closer look

All Thonk kits are sold under our standard Terms and Conditions - <http://www.thonk.co.uk/faq/>

DIY INSTRUCTIONS

This document gives detailed instructions that assume you have purchased a complete kit from www.thonk.co.uk. It also assumes no previous knowledge of electronics. To learn to solder try <https://youtu.be/lpkkfK937mU> and the **Adafruit guide to excellent soldering** – <http://bit.ly/1I77tF4>

**Watch and understand that whole YouTube video! If you're not achieving the results shown in the video then you need to buy new tools or seek advice.
You will not end up with a working module otherwise.**

TOOLS REQUIRED


Soldering iron, masking tape, and diagonal cutters AKA snips AKA side-cutters. A Digital Multimeter is always helpful for checking for bad solder joints and continuity. Thonk sell a range of inexpensive tools here - <http://bit.ly/1jxqF3n>



SOLDER JOINTS

Your solder joints should look like those shown as 'OK' below, they should have that neat conical shape on **BOTH sides of the PCB**. If they don't look the same on both sides then stop! Work out why from the soldering guides linked and don't continue until you are getting those results.

This isn't just OCD talking, you are very likely to end up with a destroyed, damaged or defective unit if you're not hitting that standard.

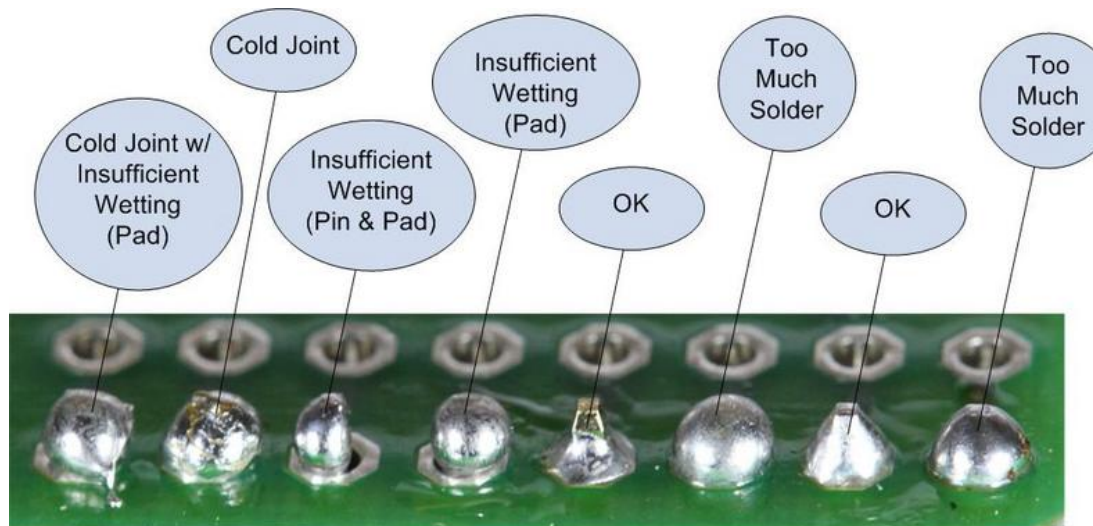

This photo is from the [Adafruit guide to excellent soldering](http://adafruit.com/guides/adafruit-guide-to-excellent-soldering) - and is reproduced under an Attribution-Sharealike creative commons license - <http://creativecommons.org/licenses/by-sa/3.0/>



GLOOP BUILD INSTRUCTIONS

PLEASE NOTE

Follow these instructions carefully and take good care and attention while building your kit. The large amount of pre-soldered components populating the PCB means you'll need to be **accurate with your solder iron placement and extra careful how you feed in your solder**. We recommend using solder that you're familiar with and that will flow easily. If you create any solder bridges, they could potentially be very hard to remove.



1.

Your Think kit includes one PCB and one panel as pictured, as well as all the necessary parts to build the module.



Front of PCB

Back of PCB

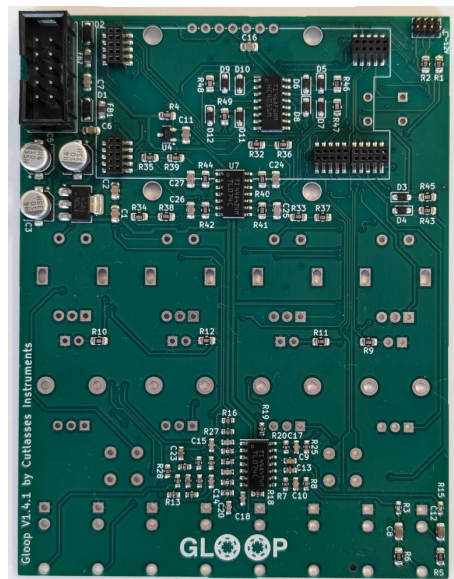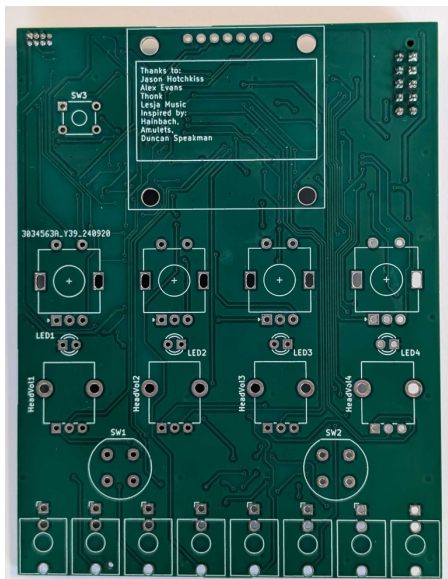




4.

Next place the OLED screen onto the pin header sitting flat on the standoffs.

DON'T SOLDER YET.

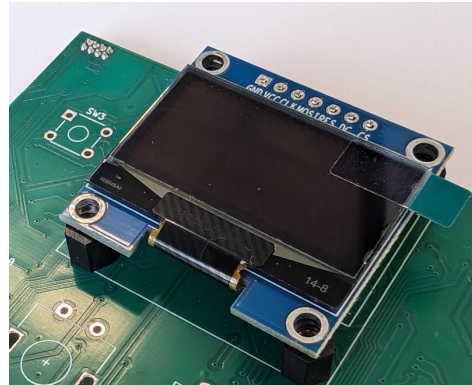

5.

Solder just one joint on the socket pins and reflow if necessary to ensure the OLED screen is flush against the standoffs

When you're happy with the positioning of the OLED screen solder the remaining joints.

You can then remove the protective film from the screen.





6.

Next place the large red and white buttons.

IMPORTANT - these buttons are polarised which means they must be placed following the correct orientation.

One side of the button has a flat edge - this flat edge must match up with the flat outline on the PCB.

DON'T SOLDER YET
Resume soldering at step 11.

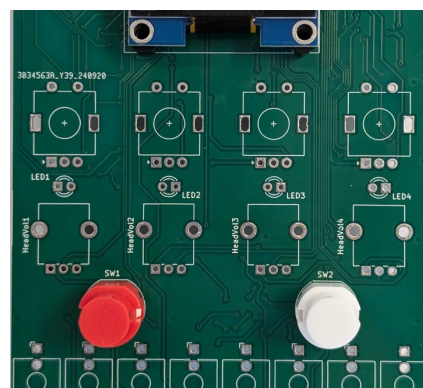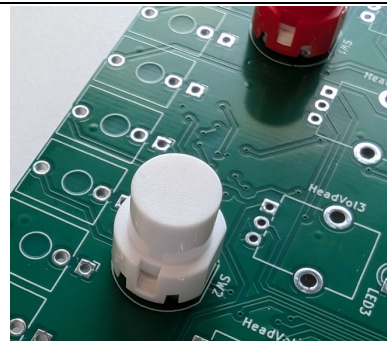




7.

Next place the four yellow LED's into the positions pictured.


IMPORTANT – the LEDs are polarised and must be placed with the correct orientation.

The long leg is positive and must be placed into the round pad, while the short leg is negative and must be inserted into the square pad.

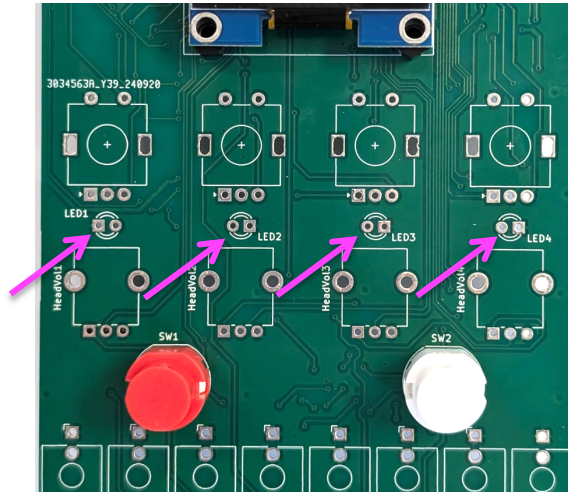


Be aware for kits purchased in December 2025 or earlier, LED 1 has the square pad on the opposite side from the other three LEDs.

2025

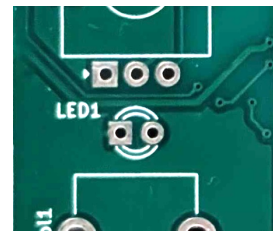

Check your PCB and ensure all LED's have the short leg inserted into the square pad.

2026

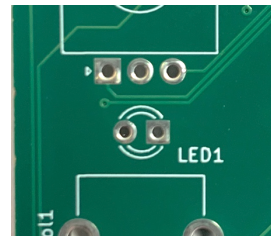

DON'T SOLDER YET
Resume soldering at step 11.




8.

Place the jacks, tact switch and switch cap, four pots and four encoders onto the PCB as pictured.

Note that you will have 7 black jack sockets and one green.

The green jack socket must be placed in the left most position as pictured.

**DON'T SOLDER YET
Resume soldering at step 11.**

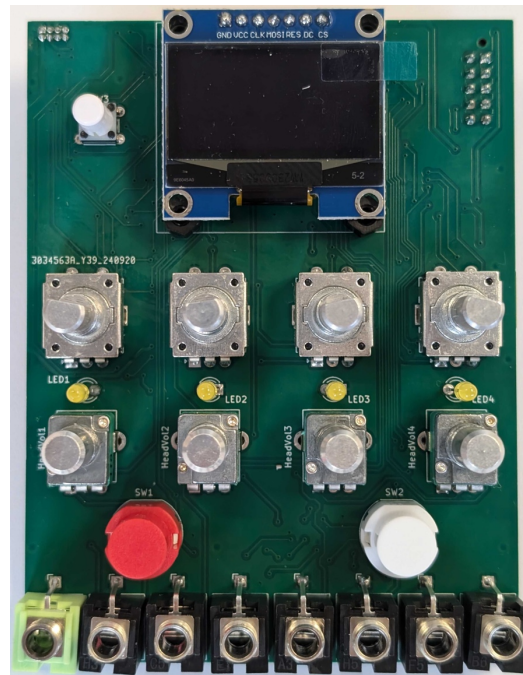

9.



Find the washers and nuts from your kit bag and first place 3 washers on each of the two middle encoders.

Using the two provided silver pot nuts, screw one nut onto each of the middle encoders as pictured.

You should have eight black pot nuts remaining (kits from October 2025 onwards) OR four pot nuts remaining (kits from September 2025 and before).

Only four of these are needed for the next step and essential for the rest of the build

**DON'T SOLDER YET
Resume soldering at step 11.**

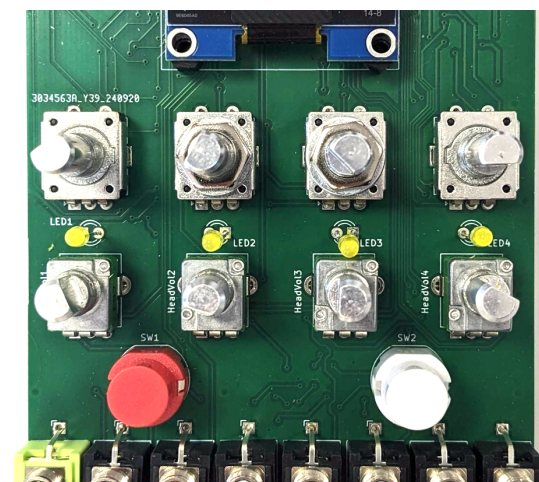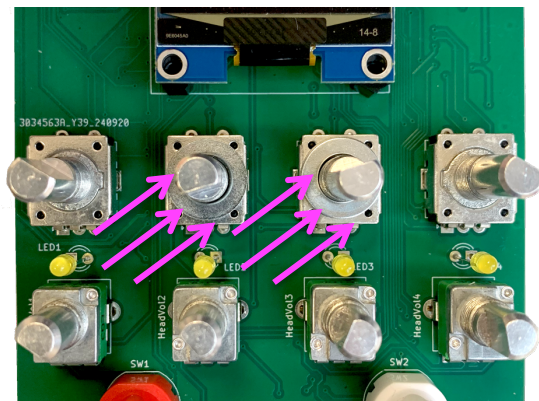



10.

Ensure the tact switch is pushed securely into the PCB, then place the panel onto the components and secure it by placing nuts on the jacks and bottom row of pots only.

Poke the LEDs through their panel holes.

DON'T SOLDER YET
Resume soldering at step 11.



11.


First solder just one joint on each of the larger red and white buttons. Ensure these buttons are sitting flush to the surface of the PCB and can be pressed smoothly from the front.

Reflow and adjust if necessary, then solder the remaining three joints on each button.

12.

Double check that the remaining parts are all sitting flat against the PCB and then go ahead and solder the small tact switch, the jacks, pots and the encoders.

Double check the LED's are poking through their holes and then solder those in place before clipping the excess LED legs.

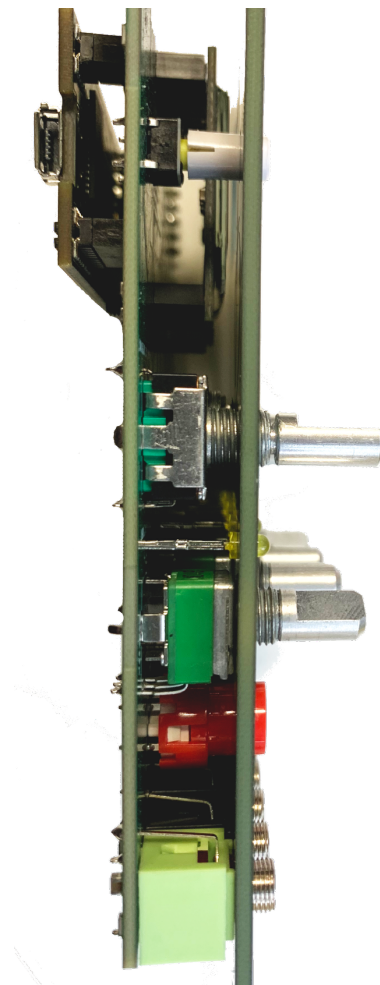



13.

Screw the remaining four black pot nuts onto the encoders (included if your kit was purchased in October 2025 or after).


Place the four silver knobs and four white knobs onto the pots and encoders as pictured.



14.

Now take your Daisy Seed 2 DFM board from the kit bag and connect it to the back of the PCB as pictured.


Boards from Thonk come programmed with the test firmware used to check the PCB and Daisy are working as intended.

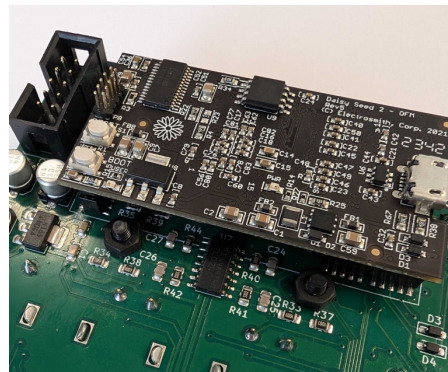



15.

Attach the ribbon cable to the back of the module as shown following the correct orientation of the red line.

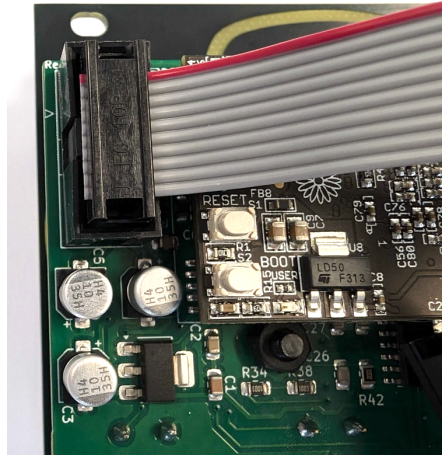

16.

Power on your module and you should see the screen as pictured.

Go through the test process detailed under 'Testing' on the page at the link below.

<https://github.com/cutlasses/GloopResources>





17.

Once the module is tested switch off the power and unplug the ribbon cable from the back.

The daisy board will now need reprogramming with the most recent Gloop firmware using a micro USB B cable and the web programmer linked below.

<https://flash.daisy.audio/using>

The following is a guide to re program the daisy board using Mac OS.

18.

First download the most recent firmware file from the github link below.

<https://github.com/cutlasses/GloopResources/tree/main>


Connect your daisy board to the computer using a micro USB B cable.

Ensure you do not power the module via the ribbon cable whilst it is connected to a computer via USB.

19.

Once the file is downloaded click 'CHOOSE FILE' on the web programmer and navigate to your Gloop firmware download.

Your screen should look like the image here.

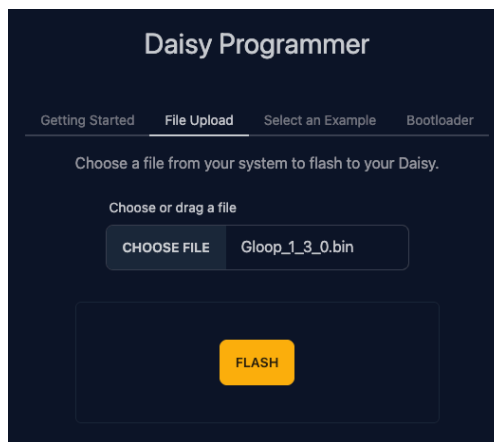




20.

Next click the yellow 'FLASH' button on the web programmer, a pop up window will appear.

Hold the BOOT button down on the Daisy Seed, and then press and release the RESET button.

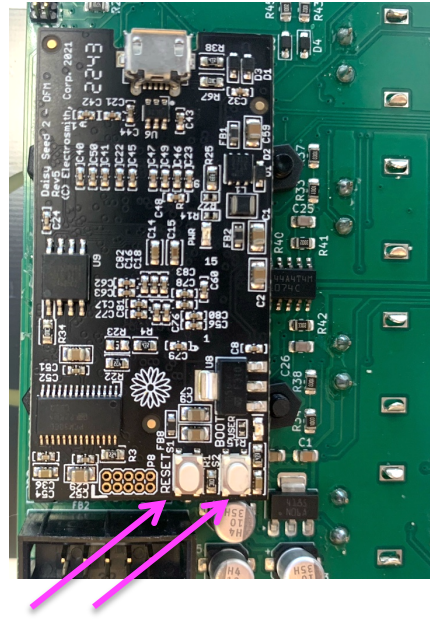


RESET BOOT

21.

The pop up window will now look as pictured.

Click 'Connect' on the window and the daisy board will reprogram with the selected firmware.

The web programmer will show an upload progress bar.

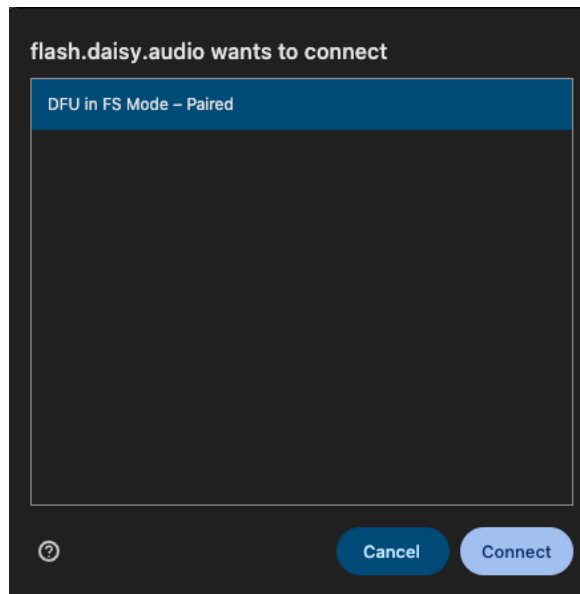




22.

Wait for the reprogramming to complete then disconnect your module from the computer before reattaching the ribbon cable.

Ensure you do not power the module via the ribbon cable whilst it is connected to a computer via USB.

The module is now complete!

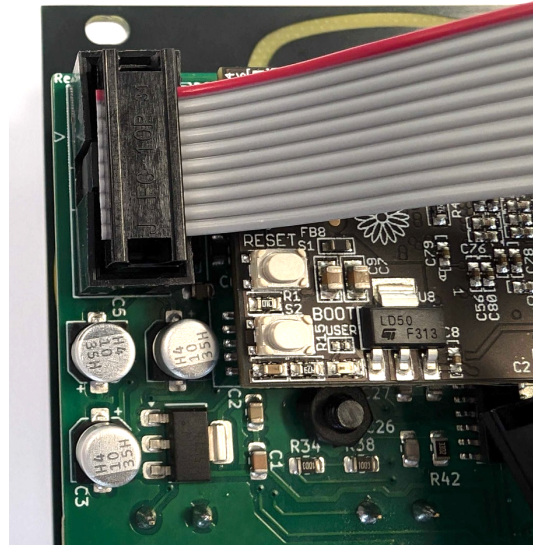

Follow the instructions in the user manual to calibrate your module and for a guide on using the features of Gloop.

Click the link below to find the user manual and other info on the Think website.

<https://www.thonk.co.uk/shop/cutlasses-gloop>

