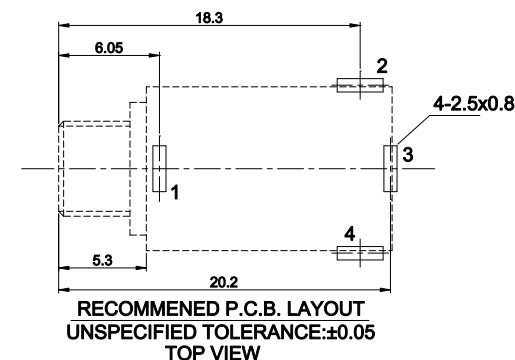
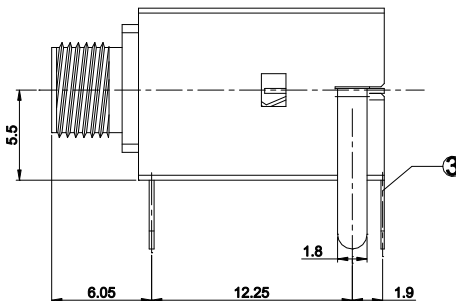
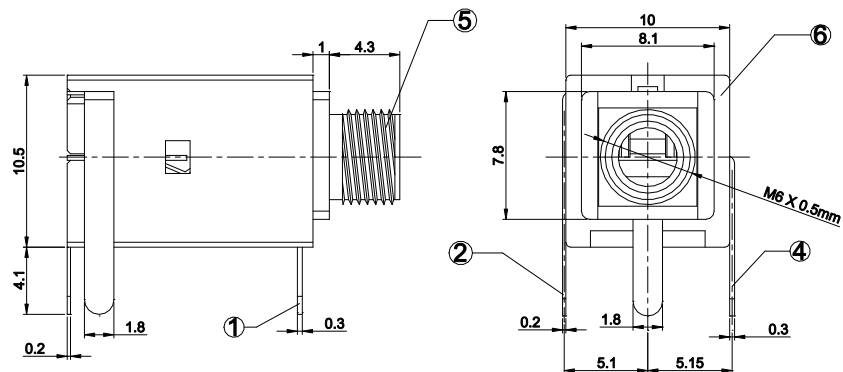


SPECIFICATION
1.Rating : DC 30V 0.5A;
2.Contact resistance: $\leq 0.03\Omega$;
3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-20N;
6.life test: 5,000 cycles.

6	HOUSING	1	PBT	
5	BUSHING	1	H59 BRASS	Ni-Plating
4	SHUNT TERMINAL	1	H59 BRASS	Ag-Plating
3	TIP	1	BERYLLIUM COPPER	Ag-Plating
2	RING	1	BERYLLIUM COPPER	Ag-Plating
1	SLEEVE	1	H59 BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWING:

WENZHOU QINGPU ELECTRONICS CO., LTD.

DESIGNED BY:	XCS	TOLERANCE	TYPE:	3. 5MM PHONE JACK
CHECKED BY:	SJY	± 0.10	MODLE NO:	WQP-WQP729JH
APPROVED BY:	JCP	ANGLES	VER: A	UNIT: mm
		PAGE: 1 OF 1	SCALE:	PAPER: M