


# THONK SYNTH $\tau$ 09 MUL

**MUL** is a simple passive utility featuring three independent 1-to-3 multiples. Each channel is normalised downward, allowing you to use it as a single 1-to-9 multiple or split it into a 1-to-3 plus a 1-to-6 multiple, depending on which inputs you patch in to.

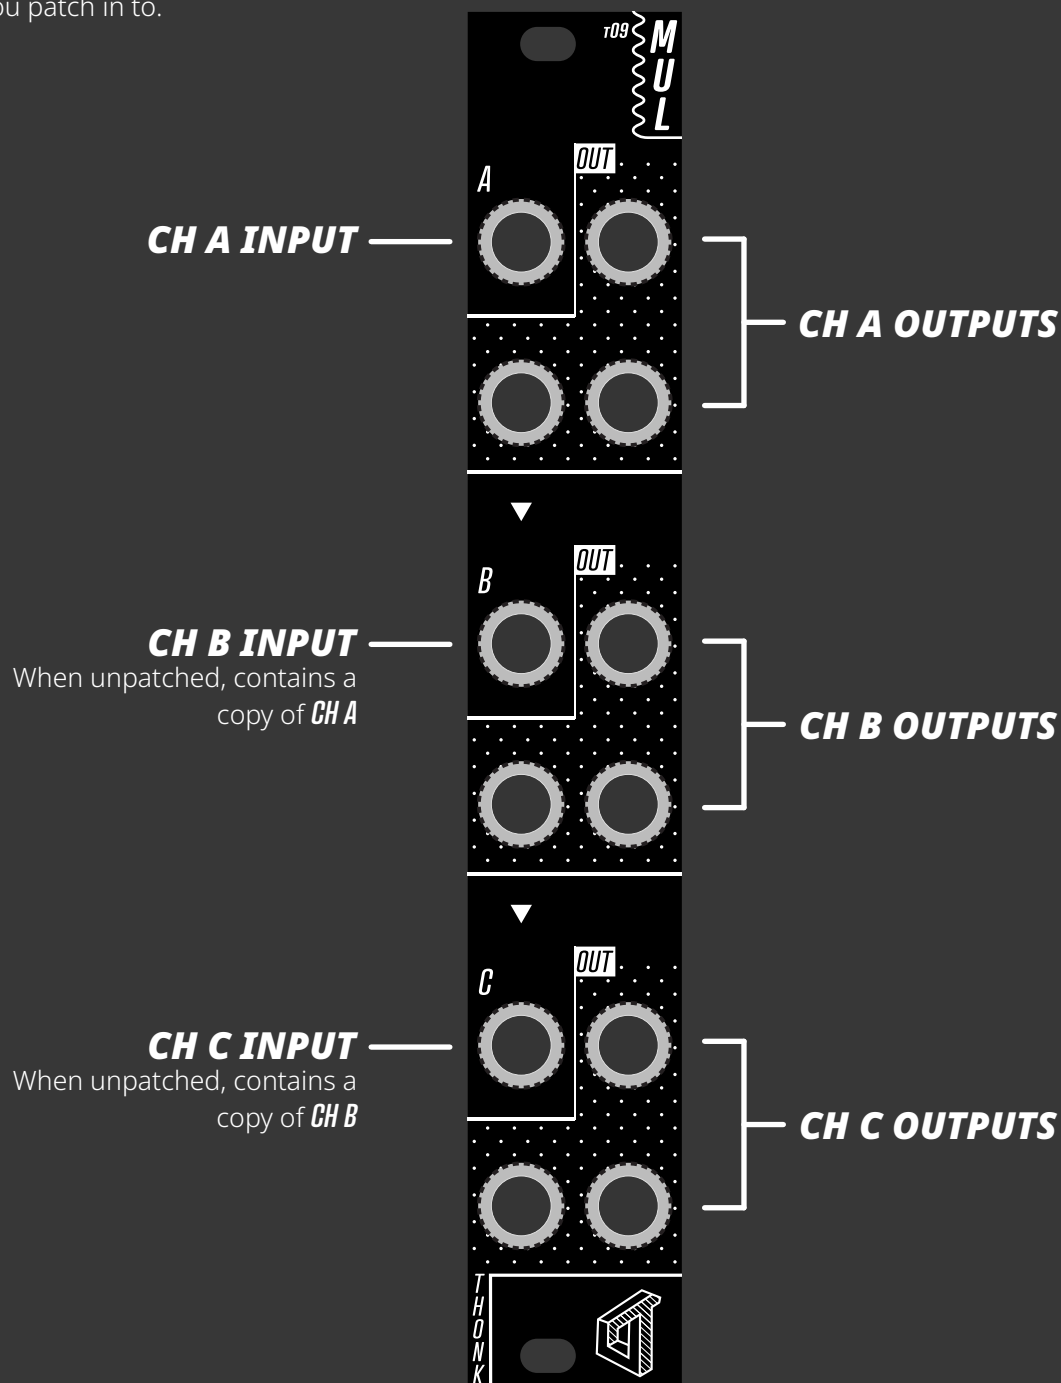

## SPECS

**Width** 4HP  
**Depth** 15mm  
**+12V** 0mA  
**-12V** 0mA  
**+5V** 0mA

## MODULE INSTALLATION

1. Turn your Eurorack system off.
2. Place the module into an empty space, and screw it into the rails using the included mounting screws.
3. This is a passive module, so no power cable is required.
4. Turn your Eurorack system on.
5. Start multiplying!